







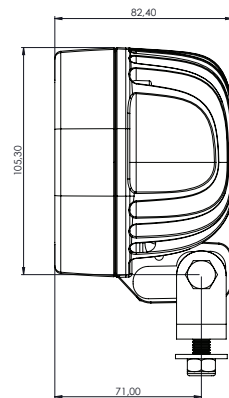

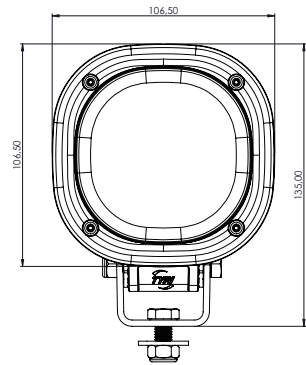

1010 Curve

PRODUCT INFORMATION:

The 1010 Curve design boasts improved, sleek and slightly curved cooling flanges to improve the overall heat transfer and efficiency. This work light is available with voltage range option for multi-voltage systems with a draw of 9V to 108V or as a single voltage model for machines operating with 12V or 24V.



-  EMC TESTED
-  IP 69K
-  VIBRATION TESTED
-  SALT SPRAY TESTED
-  E RATED OPTIONAL
-  UL RATED OPTIONAL

Operating Temp: -40° to 85°C,
-40 to 75° C

Light Pattern: Symmetric,
Asymmetric, High, Spot, Fog,

Lens Material: Plastic, Glass

Housing: Cast Aluminium

Dampened

Mounting Options: Hanging,
Standing

Connector:
Deutsch (DT04-2P) built in

LUMEN OUTPUT		Number of LED'S	VOLTAGE		AMP DRAW		Power (Watts)	Colour Temp	CRI	COMPLIANCE / RATING							
Theoretical	Effective		Machine	Operating Range	12 Volts	24 Volts				EMC EN55025 / CISPR25	IP69K	Vibration 5-2000Hz 3 Axis	Salt Spray ASTM B117	UL Rated Optional	E Approved Optional	Shock Tested	
900	700	4	12-48	9	60	1.4	0.7	17	5700	70	5	•	10 Grms	•	••		
1800	1400	6	12	9	16	1.8		22	5700	70	5	•	10 Grms	•	•		
1800	1400	6	24	18	32		0.9	22	5700	70	5	•	10 Grms	•	•		
1800	1450	8	12-48	9	60	2.5	1.3	30	5700	70	5	•	10 Grms	•	••	E-R23	
2250	1800	6	12-80	9	108	2.0	0.9	22	5700	70	3	•	10 Grms	•	•		•
2250	1850	6	12	9	16	2.3		29	5700	70	5	•	10 Grms	•	•		
2250	1850	6	24	18	32		1.2	29	5700	70	5	•	10 Grms	•	•		
3000	2500	6	12	9	16	1.9		23	5700	70	5	•	10 Grms	•	•		•
3000	2500	6	24	18	32		1.1	26	5700	70	5	•	10 Grms	•	•		•
3000	2500	4	12-48	9	60	2.8	1.4	34	5700	70	4	•	10 Grms	•	•		•

* pending