





1010 Recess

PRODUCT INFORMATION:

Part of the original and most popular 1010 series, this light has the performance of the standard 1010, however it has a unique mounting option which makes it possible for this light to be fitted recessed into the vehicle. This design allows the light to become integral to your machine's design, being flexible enough to mount in a wide variety of positions. The design of the cooling flanges, to the side of the light, makes it ideal for mounting in situations where space and air flow is restricted.

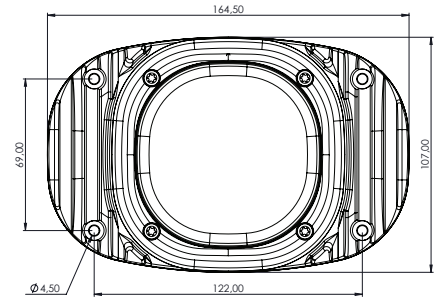

- EMC** EMC TESTED
- IP** IP 69K
- VIBRATION TESTED**
- SALT SPRAY TESTED**
- UL** UL RATED OPTIONAL

Operating Temp: -40° to 75°C,
-40° to 85°C

Light Pattern: Symmetric,
Asymmetric, High, Spot, Fog

Lens Material: Plastic, Glass

Housing: Cast Aluminium

Mounting Options: Flush

Connector:
Deutsch (DT04-2P) built in

| LUMEN OUTPUT | | Number of LED'S | VOLTAGE | | AMP DRAW | | Power (Watts) | Colour Temp | CRI | COMPLIANCE / RATING | | | | |
|--------------|-----------|-----------------|---------|-----------------|----------|----------|---------------|-------------|-----|-----------------------|-------|---------------------------|---------------------|-------------------|
| Theoretical | Effective | | Machine | Operating Range | 12 Volts | 24 Volts | | | | EMC EN55025 / CISPR25 | IP69K | Vibration 5-2000Hz 3 Axis | Salt Spray ASTMB117 | UL Rated Optional |
| 900 | 700 | 4 | 12-48 | 9 60 | 1.4 | 0.7 | 17 | 5700 | 70 | 5 | • | 10 Grms | • | • |
| 1800 | 1450 | 8 | 12-48 | 9 60 | 2.5 | 1.3 | 30 | 5700 | 70 | 5 | • | 10 Grms | • | • |
| 3600 | 3200 | 4 | 12-48 | 9 60 | 3.0 | 1.5 | 36 | 5700 | 70 | 3 | • | 10 Grms | • | |